


CERTIFIED LAND CORNER RESTORATION

Index No. **A-18**

State of Wisconsin }  
 County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 2nd day of January, 1975, I found evidence of the W-1/16 corner of Section 35-2 Township 37-36, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

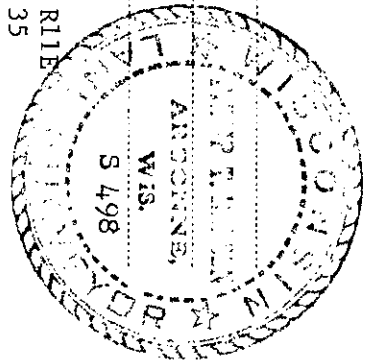


History of original corner establishment:  
 Original corner set by V.M. Maine, County Surveyor in 1916.  
 Retracement survey made by H.C. Lawrence, Reg. Land Surveyor in 1950. He states he started from the N-1/4 corner and ran S.89°30'W (mag.) 21.15 chains to Maine's W-1/16 Corner directly on line, continued S89°30'W to 42.30 chains. Corner of 2-3-34-35 is 15 lks. North. True line is S89°42'W. Set corrected W-1/16 Corner 7 1/2 lks. North of Maine's W-1/16 corner on true line, equidistant between corners at 21.15 chains.

Description of corner evidence found:  
 Recovered H.C. Lawrence's 5" cedar post, squared and scribed S2 W-1/16 S35 W-1/16 in fair condition. Maine's 4" cedar post is 7 1/2 lks. South in poor condition.  
 Recovered old BT. Sugar maple 5" S34E 25 lks. (dead)  
 No trace of other BT's.

Description of monument and accessories I established to perpetuate the original location of this corner.  
 Set 1" x 5' galvanized iron pipe with 2" brass cap stamped -

New BT's	Sugar maple 8"	N30°W	31 1/2 lks.	scribed 1/16 BT	S498
	Sugar maple 6"	N49°E	31 1/2 lks.	scribed 1/16 BT	T37N
	Sugar maple 10"	S10E	37 1/2 lks.	scribed 1/16 BT	S 35
					W-1/16 +
					S 2

CPI-1975

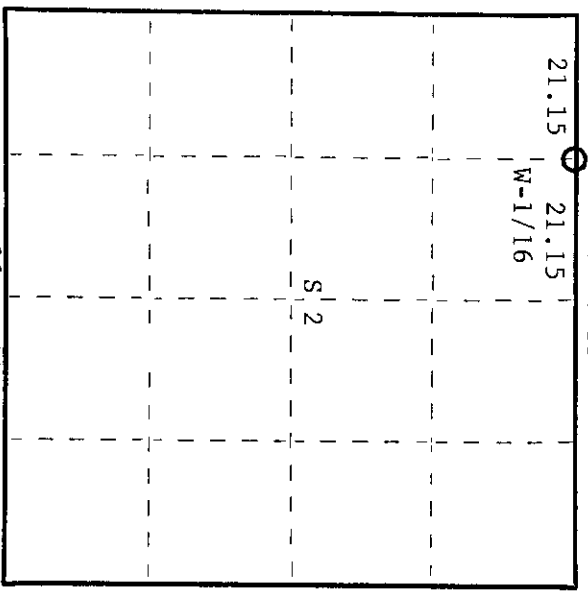

○ = Corner monument restored.

Dated at Rhinelander, Wis., this 10th day of June, 1975.  
 Signature: *Phillip T. Hansen* Title: Registered Land Surveyor Registration No. S-498  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida  
 Instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

*Donna Berge Tuelin*  
 (Register of Deeds)

By \_\_\_\_\_ Deputy

3711350030