



CERTIFIED LAND CORNER RESTORATION

Index No. **Y-19**  
**Y 19**

State of Wisconsin }  
 County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 6th day of January, 1975, I found evidence of the SC-1/16 corner of Section 35 Township 37 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

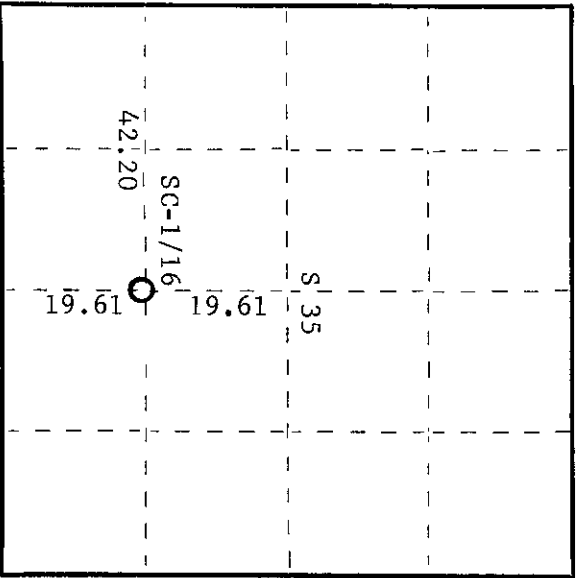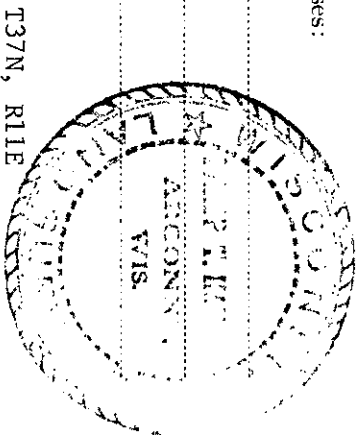

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:

Corner established by H.C. Lawrence, Reg. Land Surveyor during his retracement survey 1949. Set 5" cedar post 47 lks. East of random N-S 1/4 line and 1961 chains North of South 1/4 corner.

BT's	Bird's-eye maple 10"	N59W	43 lks.
	Yellow birch 16"	S68E	24½ lks.

Description of corner evidence found:

Recovered 4" cedar post, squared and scribed S35 SC-1/16 S35 SC-1/16 in poor condition.  
 Recovered old BT's  
 Yellow birch 17" S72E 25 lks. scribed SC-1/16 S35 BT\*  
 Maple 14" N42W 43½ lks. scribed 1/16 S35

\* Could not check Lawrence's bearing to maple BT difference of 17°.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set 1" x 5' galvanized iron pipe with brass cap stamped - S498  
 New BT Sugar maple 11" S28°W 68 lks. scribed 1/16 BT T37N, R11E

SC-1/16 S 35  
 CPI-1975

Dated at Rhineland, Wis., this \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Registrar of Deeds, County of \_\_\_\_\_  
 Instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_  
 at 3:00 o'clock P. M. I hereby certify that the within

*Doris Verage Fackler*  
 (Registrar of Deeds)

By \_\_\_\_\_ Deputy

3711351020