

CERTIFIED LAND CORNER RESTORATION


Index No. **X-18**
X 16

State of Wisconsin


County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 6th day of January, 1975, I found evidence of the WC-1/16 corner of Section 35 Township 37 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:



T37N, R11E

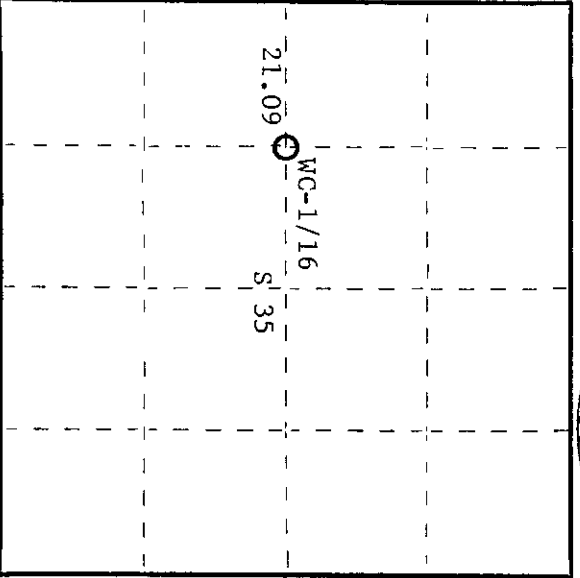

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:

This corner set by H.C. Lawrence, Reg. Land Surveyor during his retracement of this section in 1949. He ran the N-S 1/4 line S2000'E from the 1/4 corner between Sections 26 and 35, intersected his township line 63 lks. West of original 1/4 post. Bearing of true line S2028'E. He also ran N88030'E from the West 1/4 corner of Section 35 84.60 chains to a point 28 lks. North of right angles from 1/4 between Sec. 35 and 36. Bearing of true line N88040'E. WC-1/16 Corner was set 6 lks. South of East West random line and 21.09 chains East of West 1/4 post. 4" cedar post set for corner.

Set NBT's Hemlock 12" N63W 50 lks.
 Sugar 14" S50E 7 1/2 lks.

Description of corner evidence found:

Recovered 4" cedar post, squared and scribed WC-1/16 S35 WC-1/16 S35 in fair condition.
 Recovered old BT's 12" Hemlock N63W 50 lks. scribed WC-1/16 S35 BT
 No other BT's visible.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set new 1" x 5' iron pipe with 2" brass cap stamped - S498
 Made NBT's Sugar maple 8" S21E 14 lks. scribed 1/16 BT T37N, R11E
 Sugar maple 10" N13E 13 lks. scribed 1/16 BT S 35
 WC-1/16
 CPT-1975

Dated at Rhineland, Wis., this 19th day of 1975.

Signature: *Philip T. Hansen* Title: Reg. Land Surveyor Registration No. S-498
 County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

Doris Leverage Tuelker
 (Register of Deeds)

By: _____ Deputy

3711352030