


CERTIFIED LAND CORNER RESTORATION

Index No. 24-19
W 19

State of Wisconsin } ss.
County of Oneida

I Philip T. Hansen, do hereby certify that on the 27th day of May, 1975, I found evidence of the NC-1/16 Section 35 corner of 37 Township 11 East, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

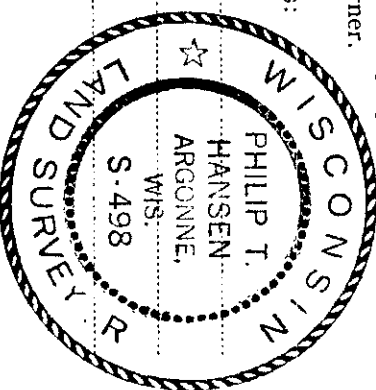

Resident witnesses:

T37N R11E

History of original corner establishment:
Corner established by H.C. Lawrence, Registered Land Surveyor, in 1949, during his retracement and subdivision of Section 35.
From established 1/2 post between Sections 26 and 35, he ran south 2°00'E 78.40 chains to intersect township line 63 links west of original 1/2 post. Corrected line 52°28'E. Set 5" hemlock post 15 1/2 links east of 19.59 chains south of 1/2 corner, from which hemlock 10" bears S49°W 34 links, and black ash 18" bears S46°E 28 links.


Description of corner evidence found:
Recovered 5" hemlock post, squared and scribed NC-1/16 S35; NC-1/16 S35, in poor condition.

Recovered OB'T's - hemlock 10"(11) S49°W(S60°W) 34 links, scribed NC-1/16 S35 BT; dead.
Black ash 18"(20) S46°E(S44°E) 28 links, scribed NC-1/16 S35 BT.

Description of monument and accessories I established to perpetuate the original location of this corner.
Replaced 5" hemlock post with 1 1/2" O.D. iron pipe with 2" brass cap stamped -

Established NBT - white birch 10" N86°W 37 links, scribed 1/16 BT. T37N R11E

NC-1/16 S 35
CPI-1975

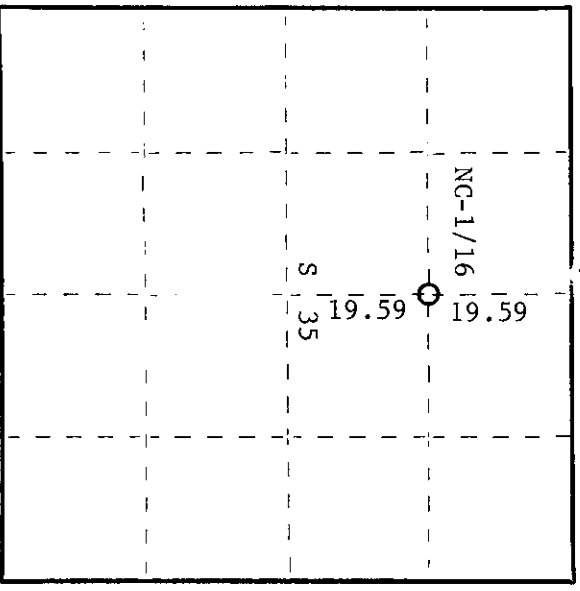

○ = Corner monument restored.

Dated at Rhineland, Wis., this 11th day of May, 1975.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 1st day of October, 1975
at 3:00 o'clock P. M.

Anna Marie Suedel
(Register of Deeds)

By Anna Marie Suedel Deputy

371135 3020