

CERTIFIED LAND CORNER RESTORATION

2-1
38-4

Index No.

//

State of Wisconsin

County of Price

SS.

I Edwood L. Olson, do hereby certify that on the 9th day of January, 1964, I found evidence of the Section corner of Sections 1-6-31-36 Township 37 and 38, North, Range 3 and 4 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
N. E. Cep T320K32

History of original corner establishment:

Original corner established in 1864 by Alex Anderson, Government Deputy Surveyor.
Spruce 6 N32W 83 links
" 6 N70E 20 links
" 6 S34E 21 links
" 6 S10W 40 links


874-9 form by Wm. H. Lambert 12/2/1936:
Spruce post 4" x 2 1/2" in good condition. Three of the witness trees were found with original scribbling:
B. Spruce 8" S120W, 40 links, 9ft., snag.
B. Spruce 8" N140W, 91 links, 3 1/2' stump.
B. Spruce 8" N810E, 21 links, fallen.

Description of corner evidence found:

Found corner marked by old decayed 5" squared post. Squared tamarac post set alongside. Check for evidence of the original bearing trees as recovered by Lambert and find:
Decayed Spruce stump, N140W, 91 links.
Decayed Spruce stump, S120W, 40 links.
I find the following bearing trees: (Marks carved with knife)
Tamarac 6" S38030'E, 42.2 feet, mkd. S6 BT.
Tamarac 7" N750E, 36.8 feet, mkd. BT.
Tamarac 4" S500W, 17.8 feet, mkd. BT (Old loc. tag)

Description of monument and accessories I established to perpetuate the original location of this corner:

Set 2" inside dia., 5' long, flanged bottom, concrete filled, galvanized wrought iron pipe with 3" bronze tablet stamped: ORIGINAL CORNER LOCATION, T38N, R3E, S1, S6, S31, S36, T37N, S.785, 1964. Monument set 13" above swamp level. Set red top cedar post 1.5 ft. N. of monument. Blazed and scribed new bearing trees as follows:
Tamarac 5" N27030'E, 42.2 feet, marked. X BT BT.
Tamarac 6" S870E, 64.3 feet, marked X BT S6 BT.
Tamarac 4" N530W, 22.0 feet, marked X BT BT.
Nail metal BT sign on all BT's. Paint BT's red.

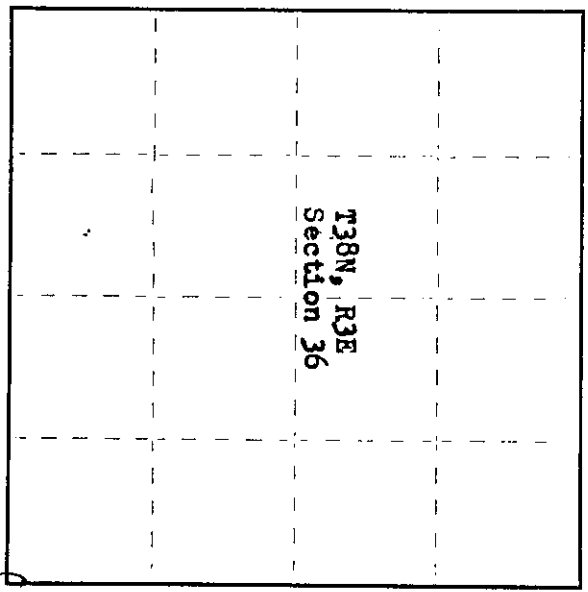


○ = Corner monument restored.

Dated at Park Falls, Wis., this 9th day of March, 1964

Signature Edwood L. Olson Title Registered Land Surveyor
(County Surveyor, Registered Land Surveyor, or other duly authorized official) Registration No. 5,785

Office of Register of Deeds, County of Price, Wisconsin
Instrument was filed in this office for record on the 19 day of March, 1964 at 10:00 o'clock A.M.

I hereby certify that the within

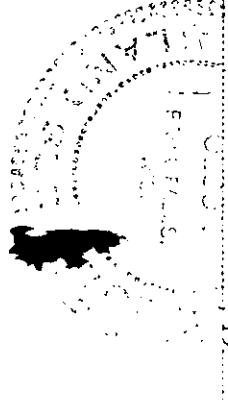

By: _____ Deputy

00009933002M