

CERTIFIED LAND CORNER RESTORATION

Index No. **Y-22**

State of Wisconsin

County of **Oneida** } ss.

I **Phillip T. Hansen**, do hereby certify that on the **13th** day of **January**, 19**77**, I found evidence of the **SW 1/16** corner of **Section 36**



Township **38**, North, Range **7 East**, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafin

Herb Wagoner

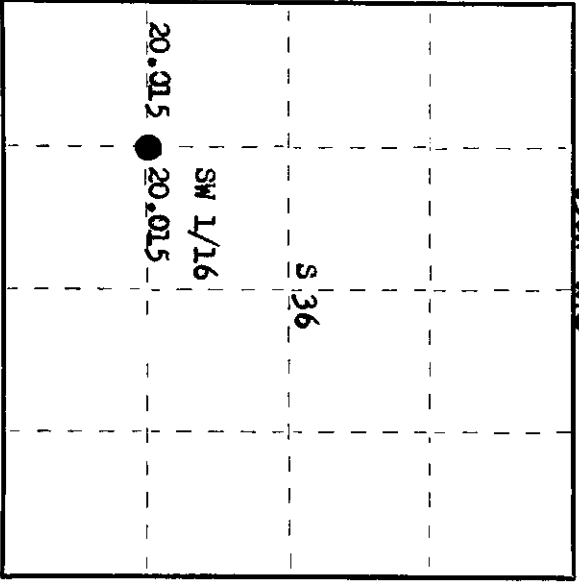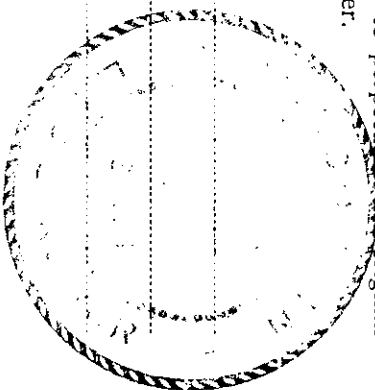

History of original corner establishment:

Corner established by Goddard and crew in 1959. Ran random line east bearing 87° 45' mag. from S 1/16 corner on west line, 40.03 chains to close out 92 links south of SW 1/16 corner. Set SW 1/16 at 20.015 chains 46 links north. Marked NBTs - Oak 7" N 54° E 33 links and White Pine 4" N 61° W 20.5 links.

Description of corner evidence found:

Recovered 1" iron pipe with 2" square brass cap in good condition and firmly set in ground.

Recovered OBTs - Oak 7" (8") N 54° E (N 62° E) 33.0 links (33.5 links), scribed SW 1/16 S36 BT.

White Pine 4" N 61° W 20.5 links, now a stump.

Description of monument and accessories I established to perpetuate the original location of this corner.

As monument was recovered in good condition, it was left in place.

Monument projects 20" above ground. Cap stamped: NBT - Maple 8" N 90° W 49.3 links, scribed 1/16 BT.

T38N R7E
S 36 SW 1/16
RIPCO

Dated at **Rhineland**, Wis., this **18th** day of **January**, 19**77**

Signature: *Phillip T. Hansen* Title **Registered Land Surveyor** Registration No. **3498**
County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of **Oneida**, I hereby certify that the within instrument was filed in this office for record on the **24th** day of **February**, 19**77** at **1:00** o'clock **P.** M.

Dorice Savage Truck
(Register of Deeds)

By: _____ Deputy

○ = Corner monument restored.

380736-1030