

CERTIFIED LAND CORNER RESTORATION

State of Wisconsin }
County of ONEIDA } ss.

I JEROME N. KRAEMER, do hereby certify that on the 30th day of April, 1981, I found evidence of the quarter corner of Sections 9 and 16 Township 38 North, Range 8 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

Original corner, a wood post, established in July, 1863 by Alexander Anderson, Government Deputy Surveyor.

Map of survey, dated October 26, 1946 by A. J. LYTLE, surveyor, shows section subdivision of Section 16, T38N, R8E, and makes reference to quarter corner common to Sections 9 and 16.

- W. Pine 12 S41°E 30 lks.
- W. Pine 12 N50°W 23 lks.

Description of corner evidence found:


Found a 1 1/4" diameter iron pipe extending 3 inches above ground level. Corner position supported by A. J. Lytle 1946 survey of which he reports distance from section corner to quarter corner is 39.96 chains. I measure same line to be 40.06 chains.

Description of monument and accessories I established to perpetuate the location of this corner:

I accepted as best available local evidence the existing 1/4 inch diameter iron pipe as the quarter corner position. Established the following new bearing trees: I blazed, scribed, set PK nail in lower blaze and made measurement to PK nail in

- OAK 11" S55°W, 25.05 feet
- MAPLE 7" S15°W, 15.39 feet (clump of three)
- MAPLE 9" S52°E, 26.15 feet

Corner approximately thirty (30) feet south of private driveway.

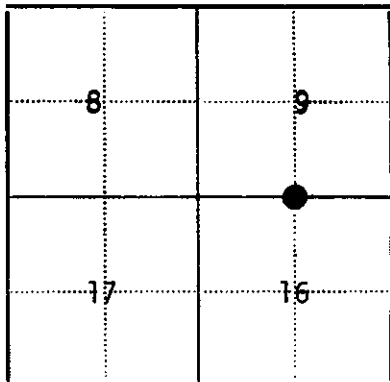

● - Corner monument restored
□ -

Resident witnesses.....

Dated at Minocqua Wisconsin, this 9th day of March 1982....

Signature *Jerome N. Kraemer* Title Reg. Land Surveyor
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Surveyors Registration No. S-1448.....

Office of *Reg. of Deeds* County of *Oneida*
I hereby certify that the within instrument was filed in this office for record on the 11 day of *June* 1980, and was filed in Book No. Page No. of County Records.

Signature *Doris Verage* Title *Reg. of Deeds*
Cynthia A. Piro, Deputy

Township....., Range....., Section....., Index No....., Page No.....

3808090020