

CERTIFIED LAND CORNER RESTORATION

Index No. A-23

State of Wisconsin



County of Oneida } ss.

I Phyllis F. Hansen do hereby certify that on the 19th day of April, 1977, I found evidence of the Quarter corner of Section 36-1 Township 38 - 37 North, Range 8 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Gafflin

Herb Wagoner

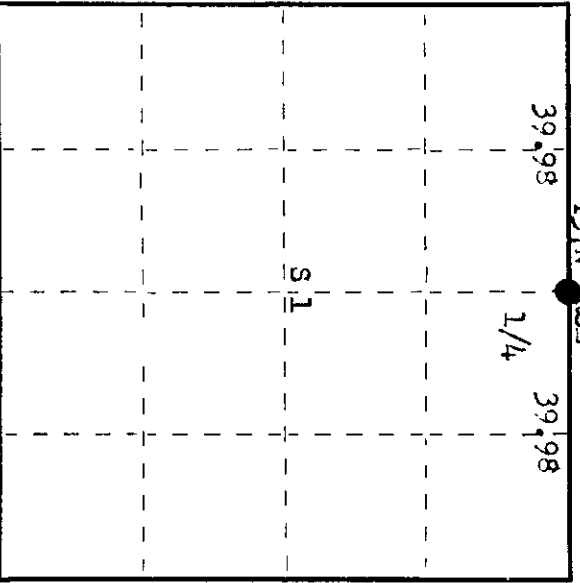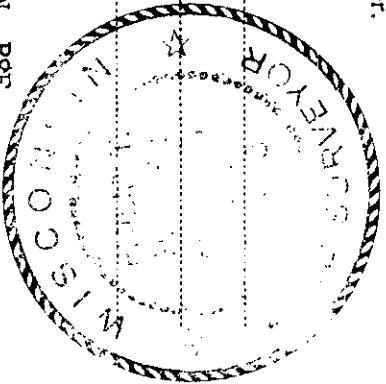

○ = Corner monument restored.

History of original corner establishment:

Original Corner established by Hiram C. Fellows, Deputy Surveyor, in 1859, from which Yellow Pine 16" bears N47°W, 65 links and Yellow Pine 1/4" bears S78°W, 104 links. Corner re-established by N. Loftus, Ripco Surveyor, in 1960. Ran a random line 269° 41' mag. from NE corner, 79.96 chains to close out 1.60 chains north of NW corner. Corrected bearing S88° 31' W. Set 1/4 corner at 39.98 chains intermediate. Marked BTs - White Pine 6" S40°E, 1.164 chains and Red Pine 12" S89°W, 1.025 chains.

Description of corner evidence found:

Recovered 1-3/4" iron pipe with 4" square brass cap in good condition and firmly in ground. Cap stamped:

Monument projects 24" above ground. Recovered ORTs - White Pine 6" (12") S40°E, 115.25 links, T38N R8E scribed 1/4 31 37-8 BT. 1/4 S36 Red Pine 12" (18") S89°W (N85°W) 102.5 links, T37N R8E scribed 1/4 S36 38-8 BT. They had bearing to red pine in wrong quadrant. RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner. As the monument was recovered in good condition, it was left as recovered. NBT - Black Spruce 6" N19°E, 70.0 links, scribed 1/4 BT.

Dated at Rhinelander, Wis., this 5th day of May, 1977

Signature: Phyllis F. Hansen Title: Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 6th day of May, 1977 at 1:00 o'clock P. M.

Denise Teranga Truick
(Register of Deeds)

By _____ Deputy

3808.36 0020