

# U.S. PUBLIC LAND SURVEY MONUMENT RECORD


Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 5.02, U.S. Public Land Survey Monument Record (3)(a)(b)(c)(d)(e)(f)(g)(h)(i). An additional sheet may be added if necessary to conform with said requirements.

(a) Corner location: Township 38 North

Range 9 East

Town/City/Village SUGAR CAMP

County ONIEDA

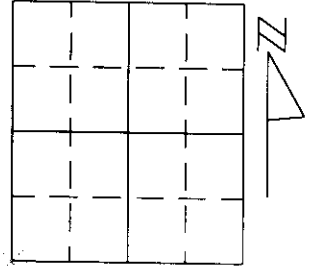


Section 20

(b)(f)(g)(h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. If not accepted or if nothing was found, state evidence used as basis for establishing location. If reestablished through lost corner proportionate methods, indicate all monuments, distances and directions used to establish.

ORIGINAL P.L.S. SURVEY: WOOD POST SET WITH 6" TAMARACK N31°W, 83 LKS., 8" TAMARACK S46°E, 47 LKS., 6" TAMARACK, S33°W, 198 LKS. AND 6" TAMARACK N77°E, 156 LKS. AS BEARING TREES. NO EVIDENCE OF ORIGINAL MONUMENTATION WAS FOUND.

I FOUND A 2" IRON PIPE WITH A WI CONSERVATION DEPARTMENT CAP. LITTLE EVIDENCE OF OCCUPATION EXISTS IN THE AREA, BUT THE CORNER HAS BEEN ACCEPTED BY OTHERS AS THE TRUE LOCATION. I ACCEPTED THIS PIPE TO BE THE BEST AVAILABLE EVIDENCE OF THE ORIGINAL LOCATION OF THE CORNER.

(c)(d)(e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

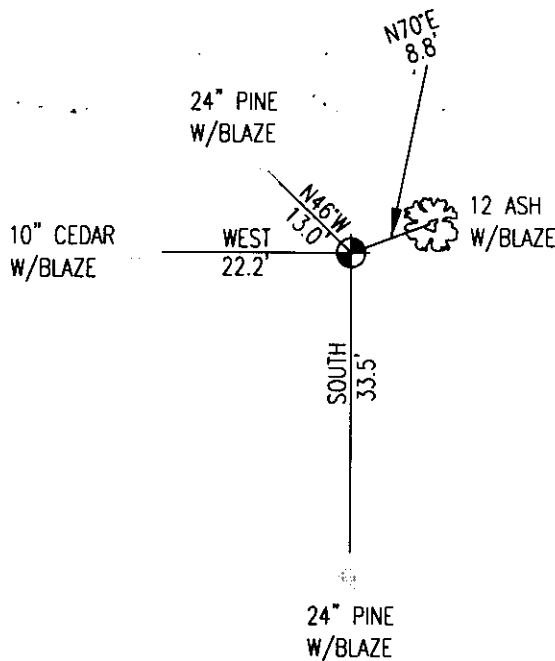

REGISTER OF DEEDS OFFICE  
ONEIDA COUNTY, WIS.  
**FILED**  
MAR 1 1999  
At O'Clock M  
**THOMAS H. LEIGHTON**  
REGISTER OF DEEDS

WISCONSIN  
★ THOMAS A. RADENZ ★  
S-2093  
WAUSAU  
WI  
LAND SURVEYOR

Index No. R 5  
3809190000

(i) I, Thomas A. Radenz, Wisconsin Registered Land Surveyor, certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Signature Thomas A. Radenz Date 2/18/99