

CERTIFIED LAND CORNER RESTORATION



Index No. **P-23**

State of Wisconsin

County of Oneida } ss.

I Philip T. Hansen do hereby certify that on the 14th day of July 19 77 I found evidence of the Quarter corner of Sec. 24 & 25 Township 38 North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
 Jim Claflin
 Herb Wagoner

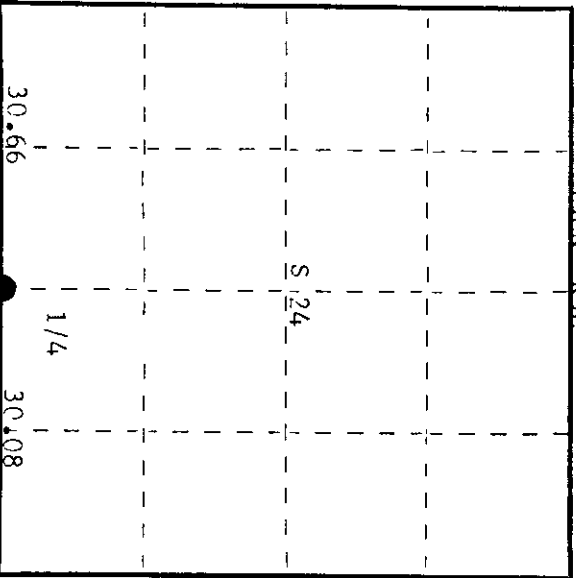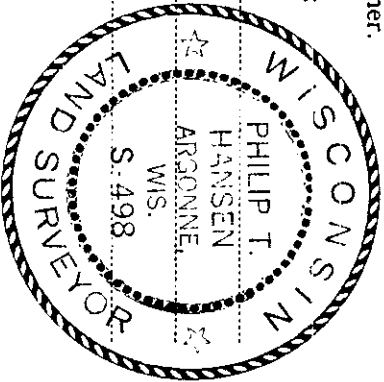

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor, in 1956. Ran random line east from well point recovered in fence corner, origin unknown, at 60.75 chains. Closed out 66 links north of previously established corner at 45.70 1/2 chains recovered old scribed corner and PT stumps, origin unknown.
 Set 1/4 corner at 30.08 chains east of Section Corner 24, 19, 30, 25.
 Marked NRTs - Red Maple 8" S20°E, 47 links; Red Maple 6" N88°W, 74 1/2 links.
 True bearing of line S89° 23" E.

Description of corner evidence found:

Recovered 2" iron pipe with 4" square brass cap, stamped:
 Monument recovered in good condition.
 Recovered OBTs - Maple 8" S20°E, 47.0 links, now stump only. T38N R9E
 Maple 6" N88°W, 74.5 links, now stump only. 1/4 S 124
 Monument projects 14" above ground. S 125

Description of monument and accessories I established to perpetuate the original location of this corner.

Marked NRTs - Maple 6" S42°E, 46.8 links
 Maple 6" N38°E, 23.2 links
 White Birch 1" N24°W, 35.8 links - all scribed 1/4 BT.

Dated at Rhinelanders Wis. this 18th day of July 19 77

Signature *Phillip T. Hansen* Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
 Instrument was filed in this office for record on the 5th day of August 19 77
 at 9:00 o'clock A.M.

Dorcas Verage Kuehn
 (Register of Deeds)

By: Deputy