

CERTIFIED LAND CORNER RESTORATION

Index No. **P-24**



State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen do hereby certify that on the 13th day of July, 1977, I found evidence of the EC 1/16 corner of Section 24

Township 38 North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses: Jim Claflin Herb Wagoner

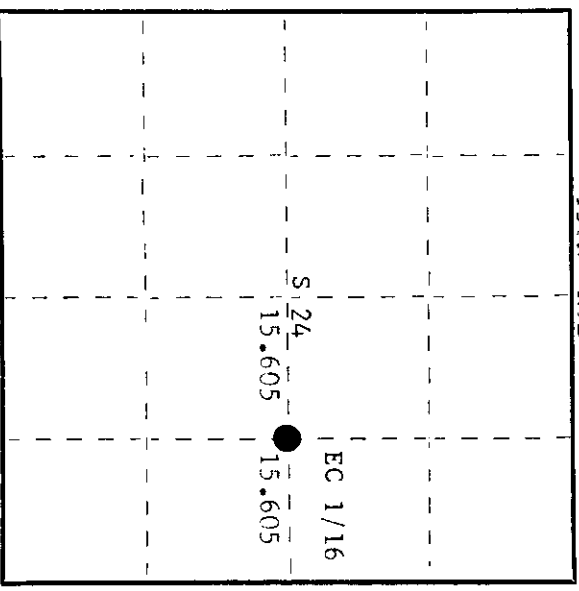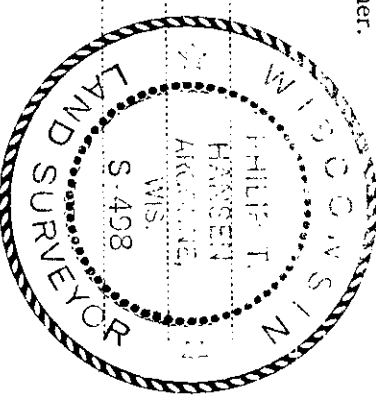

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor, in 1956. Ran random line east, previously established W 1/4 corner which is in Lost Lake N89° 06' E and at 63.08 chains, closed at 16 links north of E 1/4 corner. From established C 1/4 corner set EC 1/16 at 47.27 1/2 chains. Set iron post and marked NBTs - Cedar 4" S28° W 26 1/2 links Hemlock 8" N45° W 95 links True bearing N89° 14' 30" E.

Description of corner evidence found:

Recovered 1" iron pipe with 2" square brass cap in excellent condition. Cap stamped: Monument projects 24" above ground. Also a 1-3/4" iron pipe along side of monument. Recovered CRTs - Hemlock 8" N45° W (N42° E) 95 links Cedar 4" S28° W, 26.5 links (no evidence of this BT.) S 24 E 1/16 C RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.

Added stamping T39N R9E to stamping on brass cap. Marked NBT - Maple 7" N76° E, 106.1 links, scribed 1/16 BT.

Dated at Rhinelander, Wis., this 18th day of July, 1977.

Signature: Phillip T. Hansen, Registered Land Surveyor, County Surveyor, Registered Land Surveyor, or other duly authorized official. Registration No. S-498

Office of Registrar of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 5th day of August, 1977, at 9:00 o'clock A.M.

Doris Berge Kuehn, Registrar of Deeds

By: Deputy