CERTIFIED LAND CORNER RESTORATION

Index No. O-1

State of Wisconsin
County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 6th day of October, 19 78, I found evidence of the N 1/16 corner of Section 24 - 19 Township 38, North, Range 9 & 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

WISCONSIN
PHILIP T. HANSEN
S-498
REGISTERED LAND SURVEYOR

T38N R10E

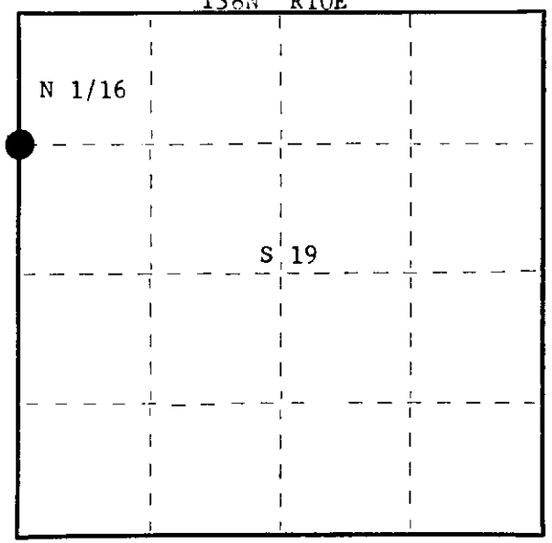

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor, in 1956. A 1" iron pipe at ground level of road. NW corner of log house bears S22°E 248½ links and 32-3/4 links - N 87° E to fence corner.

Description of corner evidence found:

Recovered Ripco's 1" iron pipe on west edge of Pitlik & Wick gravel pit. Pipe is about 3' in length, badly bent.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced bent iron pipe with 1" iron pipe x 18" long, buried 2½" below surface of roadbed. Set a 1" iron pipe with 2" brass cap one chain south of true corner. Cap stamped:
Witness monument projects 2½' above ground.
Marked NBT - Sugar 5" N86°W 161.0 links,
scribed 1/16 BT.

T38N
R 9 E — 24 — 19 — R 10 E
N 1/16
N. 1 chain
CPI-1978

Dated at Rhinelander, Wis., this 18th day of December, 19 78

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 25th day of January, 19 79 at 1:15 o'clock P. M.

Doris Verage Kuehn
(Register of Deeds)

By ..... Deputy

FORM 985 H. C. MILLER CO., MILWAUKEE

3109243000