



CERTIFIED LAND CORNER RESTORATION

Index No. U-24

State of Wisconsin }
County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 20th day of January, 19 78, I found evidence of the SE 1/16 corner of Section 25 Township 38, North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Jim Claflin
Herb Wagoner

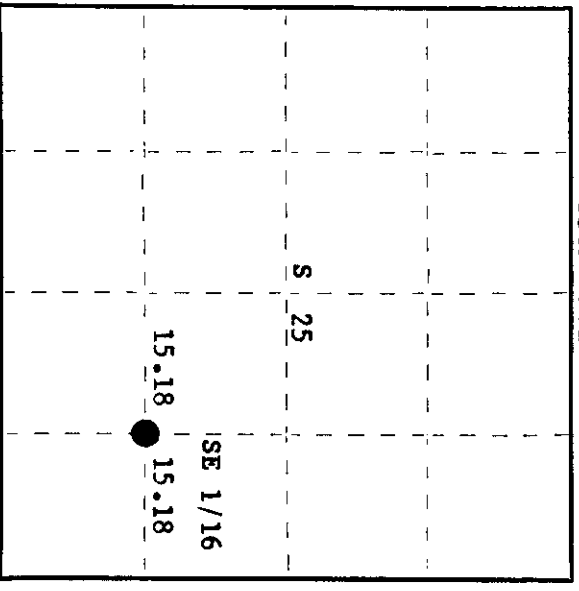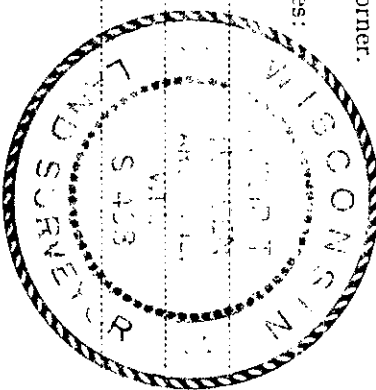

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor, in 1957. From previously established SC 1/16 ran traverse east 92° 15' magnitude 30.36 chains to close out 2 links south of S 1/16 on east line. Set SE 1/16 at 15.18 chains, corrected bearing S87° 15' E. Marked NBR's - White Pine 9" N36°W, 60 1/4 links Red Pine 14" N14°E, 94 links

Description of corner evidence found:

Recovered 1" iron pipe with 2" square brass cap in good condition and securely set. Recovered OBR's - White Pine 9" (16") N36°W, 60.25 links, scribing grown over.

Red Pine 14" (18") N14°E, 94 links, scribed SE 1/16 S25 BT.

SE 1/16
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner. As monument was in good condition, it was left as recovered. Monument projects 8" above ground.

Dated at Rhinelander, Wis., this 25th day of January, 19 78

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)
Office of Register of Deeds, County of Oneida
at 9:30 o'clock A. M. on the 6th day of February, 19 78.
I hereby certify that the within instrument was filed in this office for record on the

Doris Leverage Kuehn
(Register of Deeds)

By _____ Deputy
O = Corner monument restored.