CERTIFIED LAND CORNER RESTORATION

Index No. A-17

38093400000

State of Wisconsin
County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 20th day of September, 1976, I found evidence of the Section corner of 2 & 3, 34 & 35 Township 37-38, North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Koner

History of original corner establishment:

Original corner established by H.C. Pellows in 1859.
Corner recovered by D.F. Dorr, County Surveyor. Found original corner.
Corner recovered by A. Loftus, Nipco surveyor, in 1959. Ran random line west from Sec. Cor. 35, 36, 1 & 2 S 84° 13' W., 78.85 chains to Sec. Corner.

Description of corner evidence found:

Recovered 2½" iron pipe with 4" square brass cap stamped: T38N. R9E
Also a 3" squared cedar post, scribed 2, 3, 34, 35. There is also a ½" 34 | 35
iron pipe driven alongside the corner. 3 | 2
Recovered 6"T - Tamarack 8" S 37° W 14.3 links, scribing down over. T37N. R9E
Tamarack 8" S 78° W 55.5 links, scribing down over.
Monument projects 20" above ground.

Description of monument and accessories I established to perpetuate the original location of this corner.

As the monument was recovered in good condition and firmly in ground, it was left in place.

2 Ts - Tamarack 8" S 2° W 38.2 links, scribed 2 T.
Black Spruce 8" N 85° W 69.2 links, scribed 2 T.

T37N. R9E

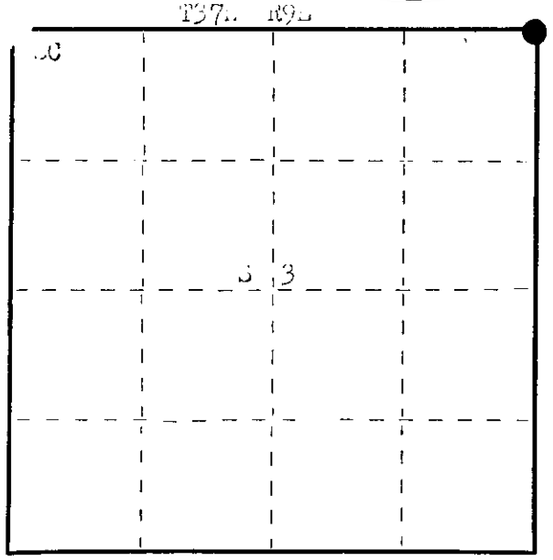

○ = Corner monument restored.

Dated at Rhinelander, Wis., this 4th day of November, 1976.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 2nd day of December, 19 76 at 9:30 o'clock a M.

Doris Verage Kuehn
(Register of Deeds)

By ..... Deputy

FORM 985 H. C. MILLER CO., MILWAUKEE