CERTIFIED LAND CORNER RESTORATION

Index No. V-15

State of Wisconsin }
County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 20th day of October, 19 77, I found evidence of the Quarter corner of Section 27 & 34 Township 38, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Al Claflin [illegible]

Herb Wagoner [illegible]

WISCONSIN [illegible] S-498 LAND SURVEYOR

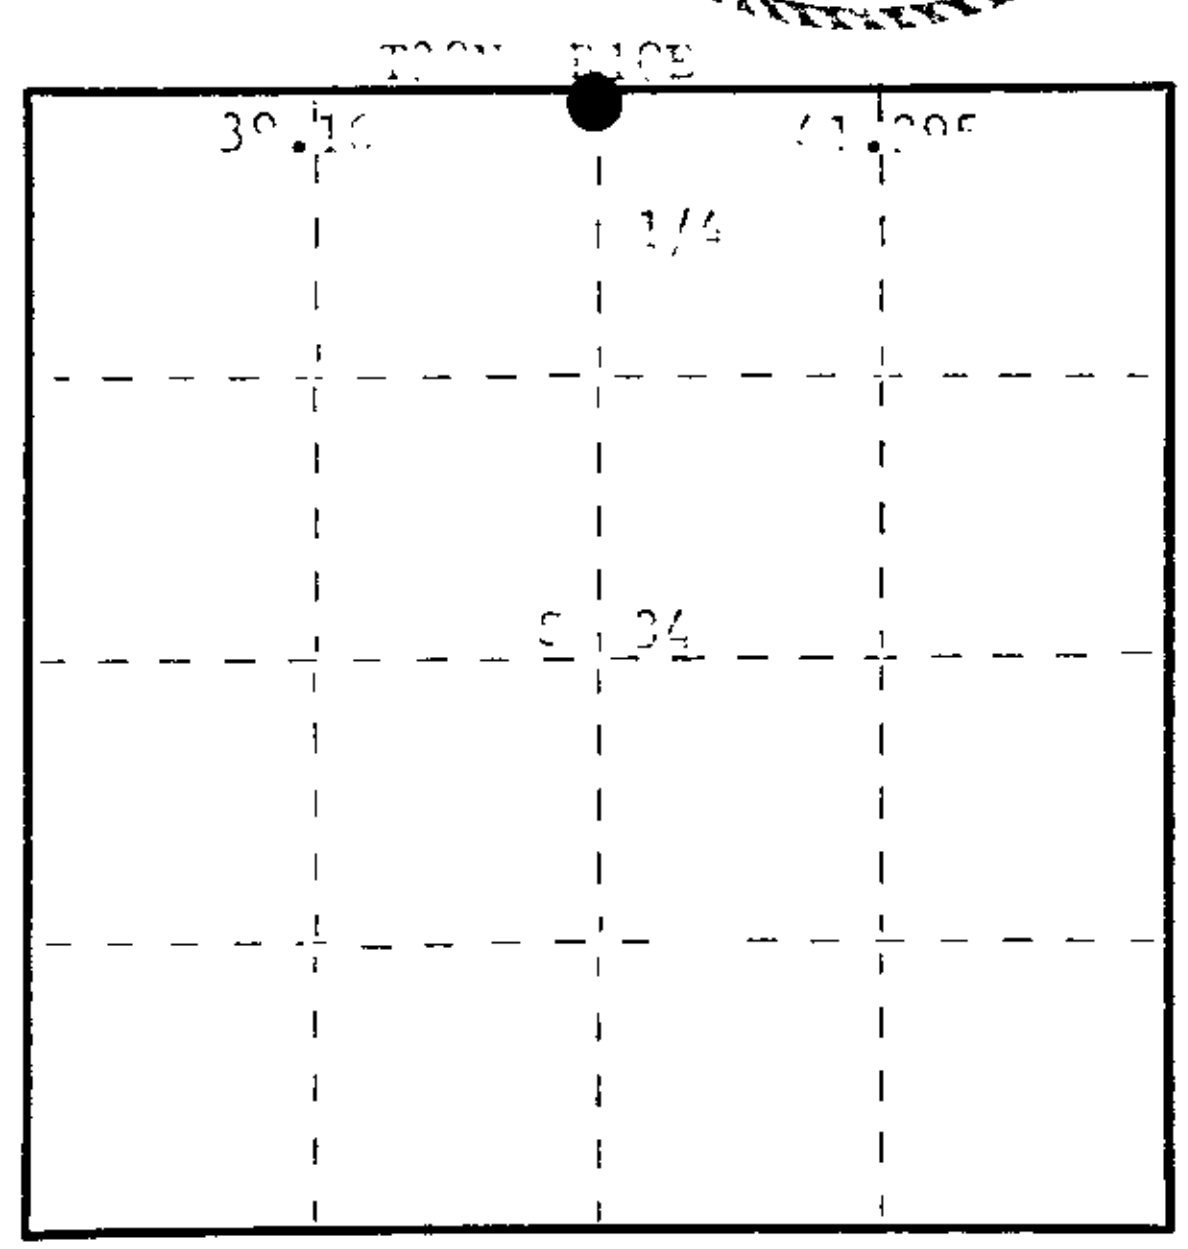

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Daugherty, Deputy Surveyor, in 1862, from which Tamarack 10" bears N10°E, 13 links; Tamarack 7" bears S13°W, 4 links.

Corner re-established in 1958 by M. Loftus, [illegible] Surveyor, by [illegible]. [illegible] line bearing 91° 10" magnitude + 121.75 chains, closed out 2.67 chains [illegible] of 1/4 corner between Sections 26 & 35. Set 1/4 corner at 39.16 chains, [illegible].

Set iron pipe and marked BTs - Tamarack 3" [illegible], 3[illegible] links
Tamarack 3" S1[illegible], 6[illegible] links

No evidence of any corner recovered.

Description of corner evidence found:

Recovered [illegible]" iron pipe with 2" brass cap in good condition.
Monument projects 24" above ground. Cap [illegible]:
[illegible] BTs - Tamarack 3" ([illegible]) [illegible] ([illegible]) [illegible] links.
Tamarack 3" (5") [illegible] ([illegible]) 6[illegible] links (5[illegible] links)
[illegible] PT.

T38N R10E
1/4 S 27 / S 34
[illegible]

Description of monument and accessories I established to perpetuate the original location of this corner.

Monument left in place as recovered.
Marked BT - Tamarack [illegible], 6[illegible] links, [illegible] 1/4 PT.

Dated at Rhinelander, Wis., this 3rd day of November, 19 77

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 12th day of December, 1977 at 11:00 o'clock a. M.

Doris Verage Kuehn
(Register of Deeds)

By *Joseph M. Boomer* Deputy

FORM 985 H. C. MILLER CO., MILWAUKEE

3810270020