

CERTIFIED LAND CORNER RESTORATION

Index No. V-11

State of Wisconsin

County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 29th day of January, 19 78, I found evidence of the Quarter corner of Section 28 & 33



Township 38, North, Range 10 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafflin

Herb Wagoner

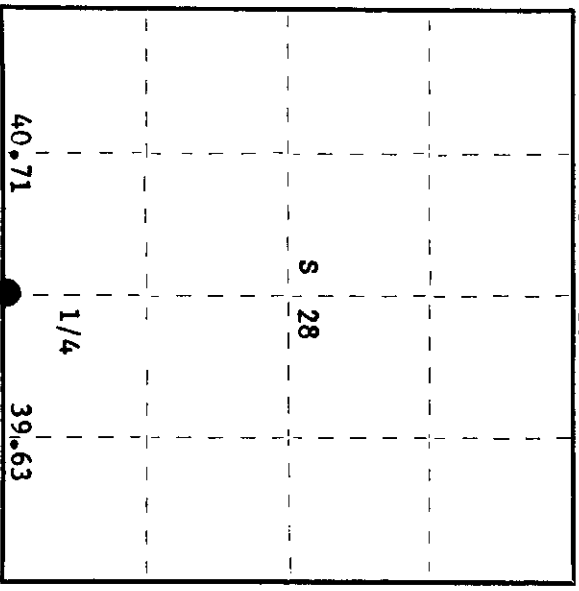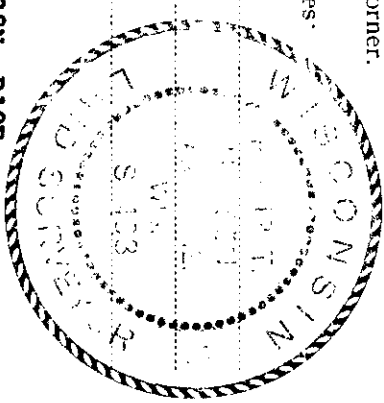

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1863, from which Birch 8" bears N 21° W, 10 links and Hemlock 7" bears S35°W, 4 links. D.H. Vaughan, County Surveyor, recovered this corner from original B.T. N. Loftus, Ripco Surveyor, recovered the original B.T. and hole where post had set. Set new post and marked NBT's - Red Maple 4" S59°W, 25 links Balsam 5" N8°E, 41 links

Description of corner evidence found:

Recovered 2 1/2" iron pipe with 4" square brass cap, stamped:  
 Monument in good condition, projects 20" above ground.  
 Recovered OBT's - Balsam 5" N8°E, 41.0 links (N12°E), now dead  
 Maple 4" (10") S59°W, 25.0 links, scribing grown over.

1/4 S  
 T38N R10E  
 S 128  
 S 133  
 1/4 S  
 RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.

Left monument in place as recovered.

Marked NBT's - Sugar 6" N48°W, 45.5 links, scribed 1/4 B.T.  
 Sugar 8" N2°E, 6.7 links, scribed 1/4 B.T.  
 Sugar 6" S38°E, 35.0 links, scribed 1/4 B.T.

Dated at Rhinelander, Wis., this 1st day of February, 19 78

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida 6th day of February, 19 78  
at 9:30 o'clock A. M. I hereby certify that the within instrument was filed in this office for record on the

Doris George Kubler  
(Register of Deeds)

By: \_\_\_\_\_ Deputy  
O = Corner monument restored.

3810280021