

State of Wisconsin



County of **Oneida** } ss.

I, **Phillip T. Hansen**, do hereby certify that on the **29th** day of **January**, 19 **78**, I found evidence of the **Section** corner of **Secs. 28, 29, 32 & 33** Township **38** North, Range **10 East**, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafflin

Herb Wagoner

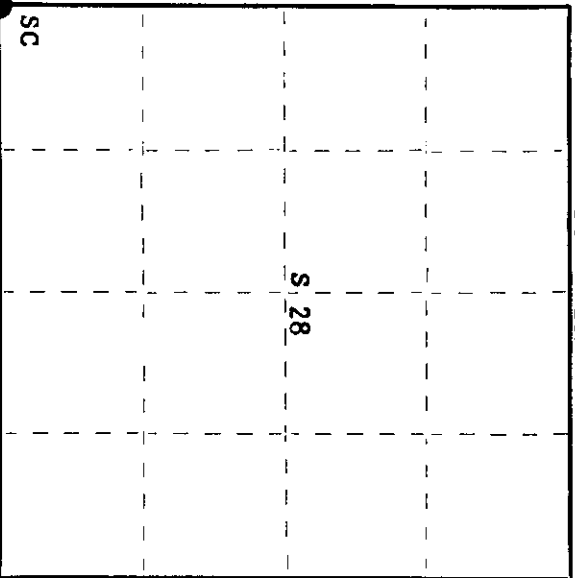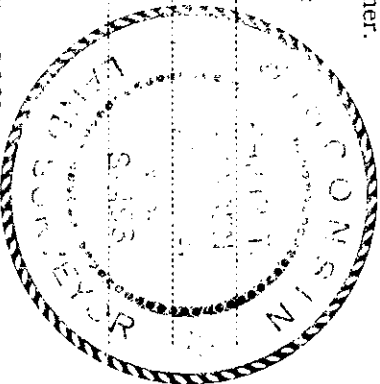

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1863, from which Birch 10" bears S45°E, 12 links and Tamarack 10" bears N76°W, 26 links.

Corner recovered by D.H. Vaughan, County Surveyor.

N. Loftus, Ripco surveyor, recovered Vaughan's BT's in place. Set new iron pipe.

Marked NBT's - Maple 9" N22°E, 34 links
Black Spruce 4" S81°W, 51 1/2 links

Description of corner evidence found:

Recovered 1 1/2" iron pipe with 4" square brass cap in good condition projecting 32" above ground. Cap stamped:

Recovered OBT's - Maple 9" N22°E (N30°E) 34.0 links, scribed S28 BT.

Black Spruce 4" S81°W (S84°W) 51.5 links, now dead.

Vaughan's hemlock stump S87°E 10.0 links, scribing not legible.

T38N R10E
29 + 28
32 + 33

Description of monument and accessories I established to perpetuate the original location of this corner.

Monument left in place as recovered.

Marked NBT's - Maple 9" S48°W, 61.4 links

Black Spruce 6" N87°W, 72.8 links

Maple 7" S58°E, 49.9 links, all scribed SC-BT.

Dated at **Rhinelander**, Wis., this **1st** day of **February**, 19**78**

Signature **Phillip T. Hansen** Title **Registered Land Surveyor** Registration No. **S-498**
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of **Oneida** at **9:30** o'clock **AM** day of **February**, 19**78**

Doris Verge Fuchs
(Register of Deeds)

By: _____ Deputy