CERTIFIED LAND CORNER RESTORATION

Index No. S-8

State of Wisconsin
County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 20th day of September, 1977, I found evidence of the NE 1/16 corner of Section 29 Township 38, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

WISCONSIN PHILIP T. HANSEN ARBONNE, WIS. S-498 LAND SURVEYOR

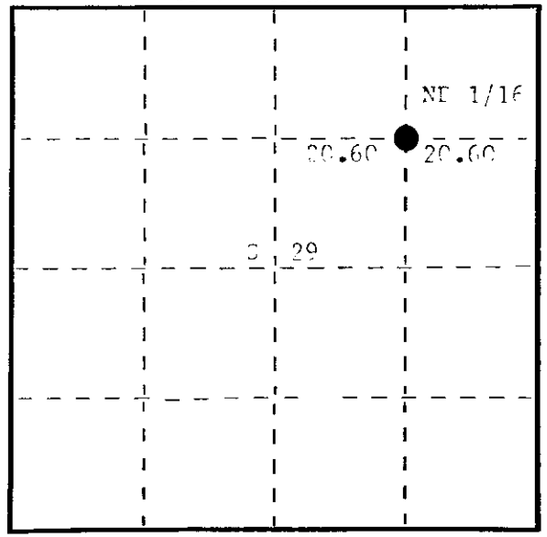

O = Corner monument restored.

History of original corner establishment:

Corner established by Goddard and crew, Pipco Surveyors, in 1961.
From previously established NC 1/16 corner, ran random line bearing 87° 56' mag. 41.20 chains to close out 4½ links north of N 1/16 Section 29 & 28.
Set NE 1/16 corner at 20.60 chains intermediate.
Marked NBTs - White Birch 4" N3°W, 70 links
Maple 3" N83°E, 65 links.

Description of corner evidence found:

Recovered stumps of Goddard's White Birch 4" N3°W, 70.0 links, scribed NE 1/16 BT.,
Maple 3" N83°E, 65.0 links, scribed 1/16 BT.
From intersection of calls, recovered an iron pin on the south edge of Brown fire lane.
Recovered a 3/4" iron pipe with 2" brass cap, due west of iron pin, 59.6 links.
Cap of this iron pipe was not stamped.

Description of monument and accessories I established to perpetuate the original location of this corner.

Scribed Pipco's brass cap.
Monument projects 24" above ground.
Marked NBTs - Maple 6" N84°E, 66.0 links, scribed 1/16 BT.
Maple 3" N35°W, 80.5 links, scribed 1/16 BT.
Bearings and distance made to true corner.

T38N R10E
NE 1/16 S 29 W.C.
E 59.6 lks.

Dated at Rhinelander, Wis., this 27th day of September, 1977

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 12th day of October, 1977 at 9:15 o'clock a M.

Doris Verage Kuehn
(Register of Deeds)

By ..... Deputy

FORM 985 H. C. MILLER CO., MILWAUKEE