

CERTIFIED LAND CORNER RESTORATION

Index No. Y-5

State of Wisconsin

County of Oneida } ss.


I Philip T. Hansen, do hereby certify that on the 12th day of May, 1977, I found evidence of the S 1/16 corner of Section 31 & 32 Township 38, North, Range 10 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

Jim Clafflin

Herb Wagoner

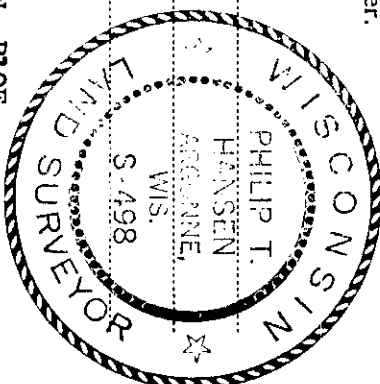

T38N R10E

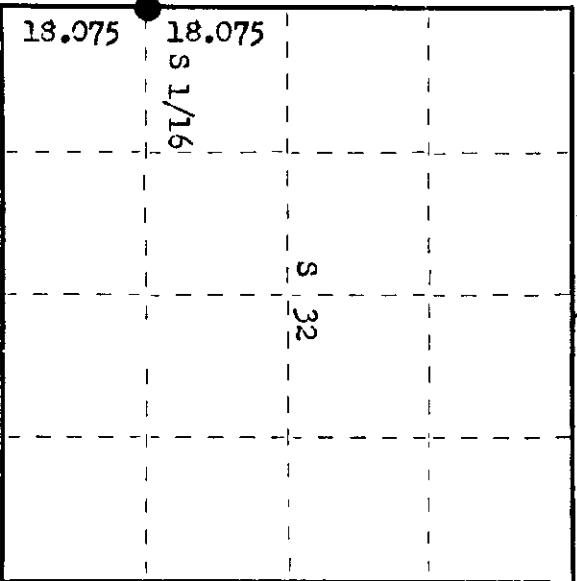

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor, From re-established W 1/4 corner ran random line south, bearing 178° 17' 18.075 chains to close out 13 links west of S 1/16 corner. Corrected bearing of line 177° 35'. Set new monument and marked NBTs - Black Spruce 3" S33°W, 28 links and Tamarack 4" S40°E, 43 links.

Description of corner evidence found:

Recovered Tamarack 4" S40°E, 43.0 links, scribed BT S 1/16 S32. Recovered corner, iron pipe, bent over but lower part intact and vertical. Someone had pushed a road into the swamp and bent the pipe over. Black Spruce 3" S33°W, 28.0 links was bulldozed out while building road.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a new 3/4" x 42" iron pipe in hole of old iron pipe, drove this flush with ground. Set a 1" OD iron pipe for witness corner 35.0 links east of corner, 2" brass cap stamped: Monument projects 28" above ground. NBTs - Tamarack 7" S13°E, 62.0 links, scribed 1/16 BT. Tamarack 5" S18°W, 84.8 links, scribed 1/16 BT. Bearings and distances to true corner. S 1/16 S31°32' W.C. W 35.0 lks.

Dated at Rhineland, Wis., this 26th day of May, 1977.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 7th day of June, 1977 at 10:30 o'clock A. M.

Arnie Berger  
(Register of Deeds)

By \_\_\_\_\_ Deputy