

CERTIFIED LAND CORNER RESTORATION

Index No. **X-3**

State of Wisconsin



County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 16th day of March, 1978, I found evidence of the C 1/4 corner of Section 31 Township 38, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafflin

Herb Wagoner

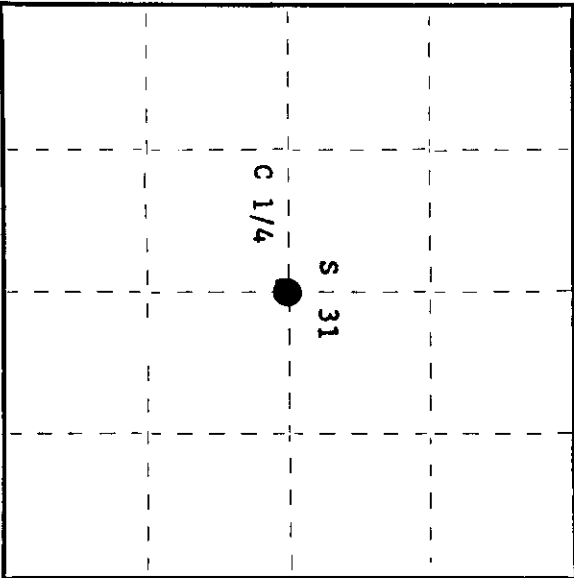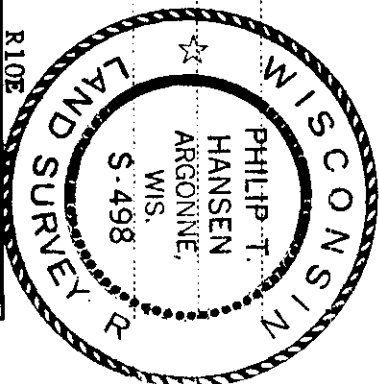

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco surveyor, in 1958. No field note records or established BT's.

Description of corner evidence found:

- Recovered 2" iron pipe with 3" diameter alloy cap, stamped: Projects 24" above ground.
- Recovered OBT - Balsam stump N88°E, 13.3 links scribed BT

S 31
C 1/4
T38N R10E

Description of monument and accessories I established to perpetuate the original location of this corner.

- NBT's - White Spruce 14" S24°E, 66.1 links
- Maple 8" N69°W, 78.5 links
- White Birch 5" S36°W, 26.9 links
- all scribed C 1/4 BT

Dated at Rhinelander, Wis., this 18th day of May, 1978

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 22nd day of May, 1978 at 1:00 o'clock P. M.

Doris George Kuehn
(Register of Deeds)

By: _____ Deputy