

CERTIFIED LAND CORNER RESTORATION

Index No. **X-2**

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby

certify that on the 16th day

of March, 1978, I found

evidence of the WC 1/16

corner of Section 31

Township 38, North, Range

10 East, Fourth Principal Meridian,

as described hereon; and that from this evidence

I established a new monument and accessories



as described hereon to perpetuate the original

location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

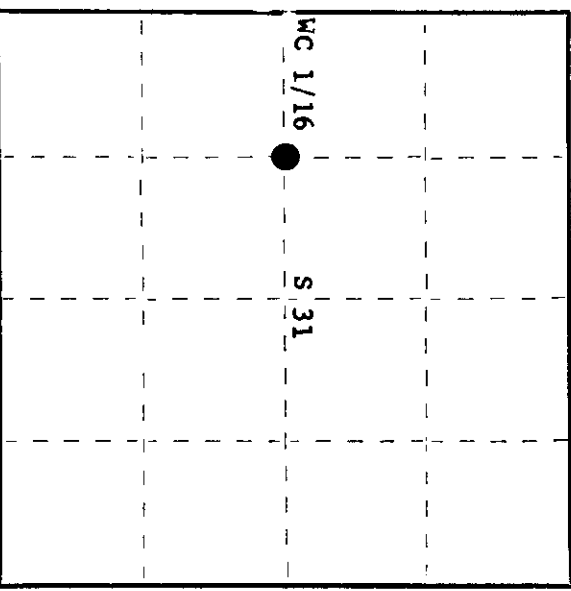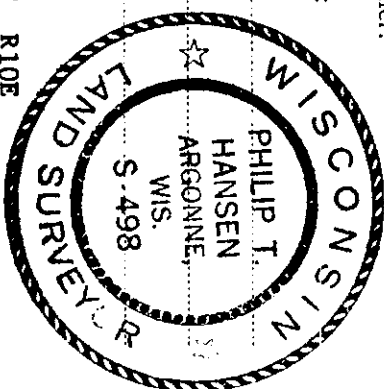

History of original corner establishment:

Corner established by N. Loftus, Ripco surveyor, in 1958.

No field note records or established BT's.

Description of corner evidence found:

Recovered a 3/4" pipe with a 2" diameter alloy cap, stamped: Pipe is a witness corner. The corner sets west 21 links in open field.

OBT's - None

(alloy cap broke)

Cor
21 lks West
CW 1/16 | S31
T38N R10E

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced old pipe with 1 1/2" iron pipe with 2" diameter brass cap, stamped:

Pipe projects 24" above ground.

Marked NBT's to witness corner

Red Pine 8" N78°E, 39.2 links

scribed W.C. BT.

Red Pine 6" S15°E, 48.7 links

scribed W.C. BT.

S498
T38N R10E
WC 1/16 S 31 W.C.
W 21 links
CPI-1978

Dated at Rhineland, Wis., this 18th day of May, 1978

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 18th day of May, 1978
at 100 o'clock P. M.

Doris Verage Fuchs
(Register of Deeds)

By: _____ Deputy

08/03/2030

○ = Corner monument restored.