

CERTIFIED LAND CORNER RESTORATION

Index No. **Y-9**

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 10th day of March, 19 78, I found evidence of the S 1/16 corner of Section 32 & 33



Township 38, North, Range 10 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafflin

Herb Wagoner

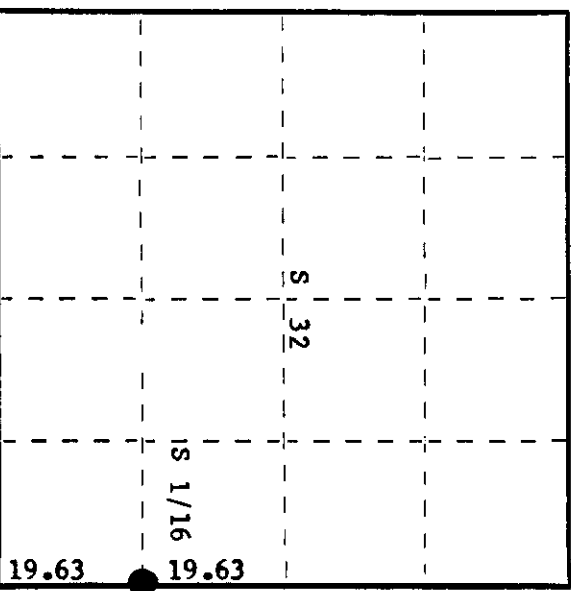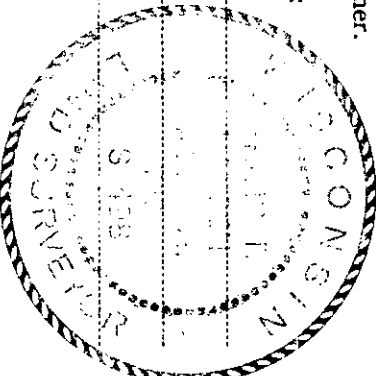

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor, in 1956. Ran random line south from re-established 1/4 corner (Dorr's), bearing S 0° 57' E, 39.26 chains, to close out 38 links east of section corner. Set S 1/16 corner at 19.63 chains intermediate. Marked NBT's - tamarack 5" N65°W, 24 links tamarack 4" N74°E, 26 links

Description of corner evidence found:

Recovered 1" iron pipe with 2" brass cap in good condition, projecting 28" above ground. A 3" square spruce post was found along side it. Cap stamped:

Recovered: tamarack 5" (6") N65°W, 24.0 links,  
 now dead. S 1/16  
 tamarack 4" (6") N74°E (S76°E) 26.5 links, S32+S33  
 scribbling grown over. RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.

Monument left in place as recovered.

Marked NBT - Maple 7" N19°W, 69.4 links, scribed 1/16 BT.

Dated at Rhineland, Wis., this 13th day of March, 19 78

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 5th day of April, 19 78 at 2:30 o'clock P. M.

Lorna Neugebauer  
 (Register of Deeds)

By \_\_\_\_\_ Deputy