

CERTIFIED LAND CORNER RESTORATION

Index No. **Y-8**

State of Wisconsin



County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 10th day of March, 1978, I found evidence of the SE 1/16 corner of Section 32 Township 38, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafin

Herb Wagoner

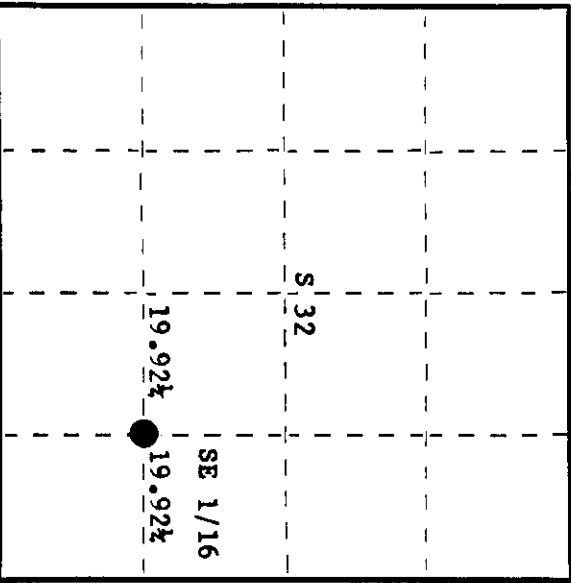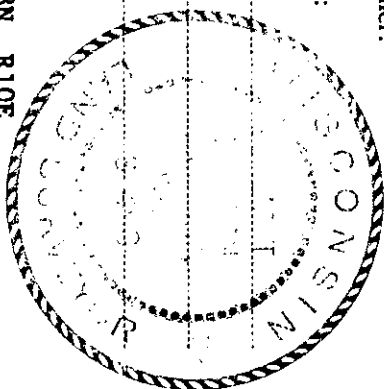

○ = Corner monument restored.

History of original corner establishment:

Corner established by Goddard, Ripco Surveyor, in 1959. From previously established SC 1/16 corner, ran a random line S 89° 45' E, 39.84½ chains, to close at 31 links north of the S 1/16 corner on east line.

Set SE 1/16 corner at 19.924 chains intermediate.

Marked NBT's - tamarack 4" N52°W, 21½ links and tamarack 6" S74°E, 70 links

Corrected bearing N 89° 34' E.

Description of corner evidence found:

Recovered 3/4" iron pipe with 2" square brass cap in good condition projecting 12" above ground. Cap stamped:

Recovered OBT's - tamarack 4" N52°W, 21.5 links,
 our bearing N63°W. SE 1/16 + S32
 tamarack 6" (7") S74°E, 70.0 links, RIPCO
 scribed BT SE 1/16 32 BT.

Description of monument and accessories I established to perpetuate the original location of this corner.
Monument left in place as recovered.
 No additional accessories established.

Dated at Rhinelander, Wis., this 13th day of March, 1978

Signature: Phillip T. Hansen Title: Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 5th day of April, 1978 at 2:30 o'clock P. M.

Dona Versteeg Kuehn
 (Register of Deeds)

By _____ Deputy