

CERTIFIED LAND CORNER RESTORATION



Index No. Y-6

State of Wisconsin

County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 24th day of April, 1980, I found evidence of the SW 1/16 corner of Section 32 Township 38, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Jim Claflin
Herb Wagoner

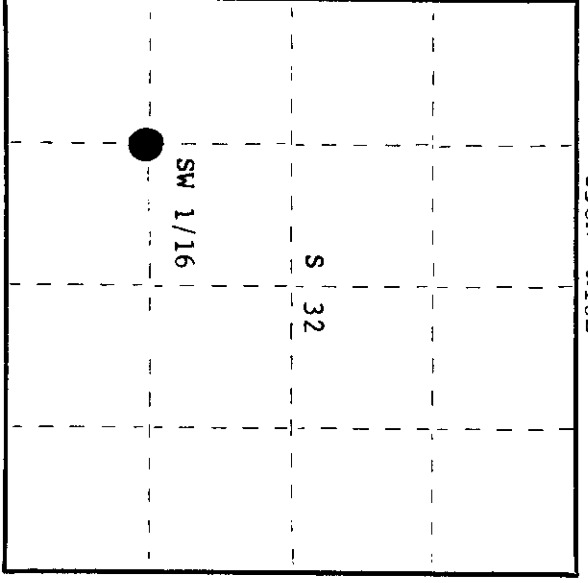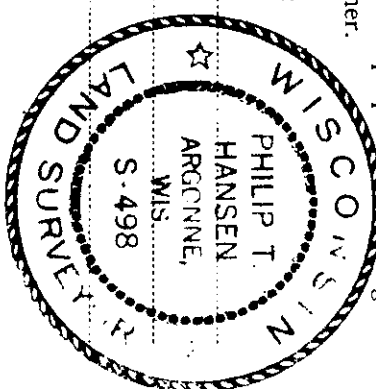

○ = Corner monument restored.

History of original corner establishment:

Corner established by Goddard and crew, Ripco surveyors, in 1959. Ran south, magnetic bearing 177° 20' from previously established CW 1/16 a distance of 37.30 chains to close out 51 links east of W 1/16 south line. Set SW 1/16 at 18.65 chains, 25-1/2 links west. Marked NBT's - Tamarack 4" N90°E 69 links Tamarack 7" N31°W 1.01 chains Corrected bearing S 1° 53' E.

Description of corner evidence found:

Recovered Ripco's 3/4" iron pipe with 2" square brass cap in good condition, projecting 12", stamped:
Also recovered an old 3" squared stake beside iron pipe.
Recovered OBT's -
Tamarack 4" (6") due east 69.0 links SW 1/16 S32
Tamarack 7" (8") N31°W 1.01 links RIPCO
scribing grown over on both BT's.

Description of monument and accessories I established to perpetuate the original location of this corner. As the monument was recovered in good condition, it was left in place. Added stamping T38N R10E to cap. No additional accessories established.

Dated at Rhineland, Wis., this 5th day of June, 1980.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)
Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 21st day of July, 1980 at 3:35 o'clock P. M.

Dennis Venage Tucker
(Register of Deeds)

By: _____ Deputy

3370327030