CERTIFIED LAND CORNER RESTORATION

Index No. W-8

State of Wisconsin
County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 25th day of October, 19 77, I found evidence of the NE 1/16 corner of Section 32 Township 38, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Hanson

WISCONSIN PHILIP T. HANSEN ARBORNE, WIS. S-498 LAND SURVEYOR

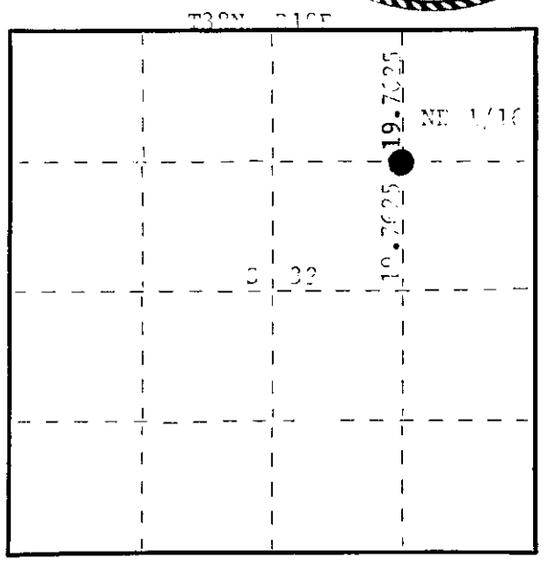

○ = Corner monument restored.

History of original corner establishment:

Corner established by M. Loftus, Piper Surveyor, in 1937. Ran random line N 1° 30' W from previously established LC 1/16 39.525 chains to close out 10 links east of N 1/16 corner, north line. Established NE 1/16 corner at 19.7625 chains intermediate. Blazed a 10" tamarack four sides for corner and set post beside it.
Marked PTs - Tamarack 4" N 38° W, 38½ links
Tamarack 5" N 38° E, 14½ links

Description of corner evidence found:

Recovered 1" iron pipe with 2" square brass cap, 2 links N 38° E of the of 10" tamarack, scribed 1/16 corner.
Recovered PTs - Tamarack 4" (5") N 38° W (N 38½°) 38.5 links (38.2 links).
Tamarack 5" (7") N 38° E, 14.5 links (15.5 links) scribed NE 1/16 32 PT.
Monument projects 36" above ground. Set at base.
Tamarack for corner fairly sound. NE 1/16 S32 BT 00

Description of monument and accessories I established to perpetuate the original location of this corner.

No additional accessories established.

Dated at Rhinelander, Wis., this 7th day of November, 1977.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 12th day of December, 1977 at 11:00 o'clock a M.

Doris Verage Kuehn
(Register of Deeds)

By Joseph M. Boomer Deputy

FORM 985 R. C. MILLER CO., MILWAUKEE

38/0 32.3/0