

CERTIFIED LAND CORNER RESTORATION

Index No. **X-10**



State of Wisconsin

County of Creda } ss.

I Philip T. Hansen, do hereby certify that on the 30th day of September, 1977, I found evidence of the NC 1716 corner of Section 33 Township 28, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Cluffin
Robt. Wagner

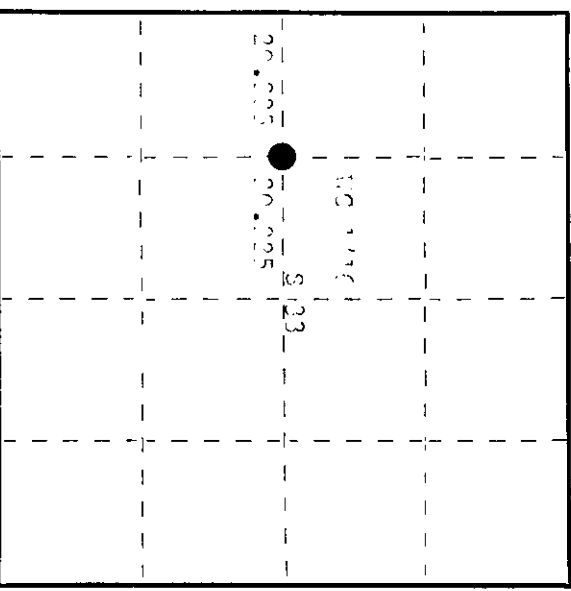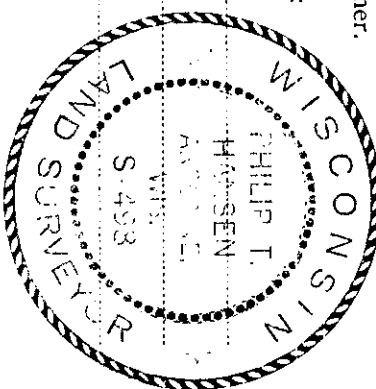

○ = Corner monument restored.

History of original corner establishment:

Corner established by M. Loftus, Pipeo surveyor, in 1956. Ran parallel line S 89° 20' E from N 1/4 Section 33, 90.34 chains to close out 1.27 chains south of E 1/4 corner. Established C 1/4 corner at 40.46 chains on corrected bearing S 90° 14' E. Set NC 1716 corner at 20.225 chains intermediate. Marked MBTs - Palsam 3" #3200, 22 links. Palsam 3" #2400, 23 links.

Description of corner evidence found:

Recovered 10' strip of 10' x 2" square brass cap in excellent condition. Monument projects 17" above ground. Cap stamped: Recovered CRTs - Palsam 3" #3200 (4746) 22 links. Palsam 3" #2400, 23 links (770 links), scribbled on 1716 CRT.

Description of monument and accessories I established to perpetuate the original location of this corner.

Left monument as recovered. Marked MBTs - Palsam 3" #3200, 22 links on the side of North 40.7 links, scribbled 1716 CRT.

Dated at Plainfield, Wis., this 4th day of October, 1977.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-458
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Creda, I hereby certify that the within instrument was filed in this office for record on the 17th day of November, 1977 at 2:42 o'clock P.M.

David George Kuehn
(Register of Deeds)

By Joseph M. Brown Deputy

3810332030