CERTIFIED LAND CORNER RESTORATION

Index No. Y-14

38/0341030

State of Wisconsin
County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 21st day of October, 19 77, I found evidence of the Sec. 1/16 corner of Section 34 Township 38, North, Range 10 east, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Griffin

Herb [illegible]

WISCONSIN P. T. HANSEN S-112 LAND SURVEYOR

T39N R10E

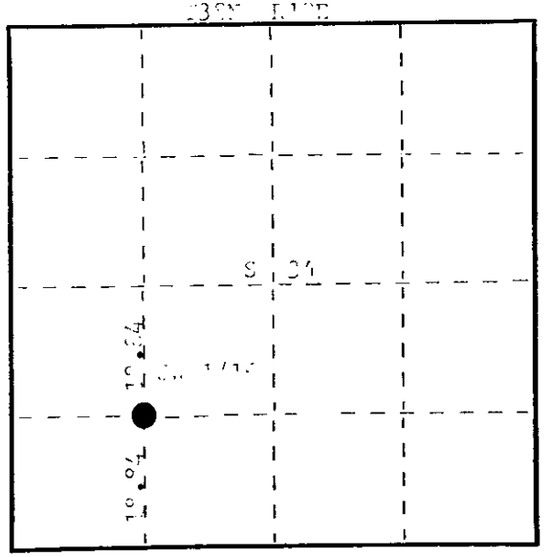

O = Corner monument restored.

History of original corner establishment:

Corner established by Davis and Crow, Difco surveyors. Tangential line bearing 358° 33' from previously established N 1/16 corner on south line 37.60 chs to close out 32 links east of C. 1/16.
Set Sec 1/16 at 10.01 chs using 16 links east.
Noted WTTs - Cedar 4" N58°W, 58-3/4 links
Cedar 4" S49°E, 42 links

Description of corner evidence found:

Recovered 3/4" from the 12" 2" square [illegible] in good condition.
Monument projects 12" above ground. Carsten [illegible]
Recovered WTTs - Cedar 4" (7") N58° [illegible] 58.75 links,
scribed C. 1/16 BL.
Cedar 4" (7") S49° E, 42.0 links

Sec. 1/16 S 34 BIRC

Description of monument and accessories I established to perpetuate the original location of this corner.

Monument left in place and covered.
No additional accessories set this time.

Dated at Rhinelander, Wis., this 2nd day of November, 19 77.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-112
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 12th day of December, 19 77 at 11:00 o'clock a M.

Lorna Verage Kuehn
(Register of Deeds)

By Joseph M Boomer Deputy

FORM 985 H. C. MILLER CO., MILWAUKEE