

Stock No. 26273

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

Index No. C 25


State of Wisconsin

County of Oneida } ss.

I, John H. Fisher, do hereby certify that on the 16 day of October 1984, I found evidence of the quarter corner of Section 1 & 6 Township 38 North, Range 11 & 12 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

None

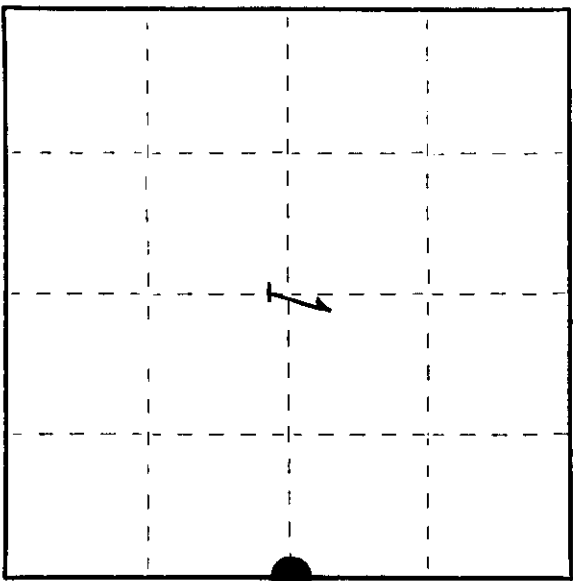

O = Corner monument restored.

History of original corner establishment: Original survey in 1858 by Alfred Millard. Dependent Resurvey in 1937 by Wesson Cook. At 34.67 chains set concrete monument 24 inches long, 6 inches diameter, 20 inches in ground with iron post 24 inches long 1 inch diameter embedded in center and a brass tablet stamped. From which the following bear:

1/4			
51	S	6	
1937	Spruce	6"	N31-3/4°E 47 lks
	Spruce	6"	S44-3/4°W 28 lks

Description of corner evidence found: B.L.M. Monument as described and in place:

Rotten Stump	N32°E	31.0 feet
Rotten Stump	S45°W	18.5 feet

Description of monument and accessories I established to perpetuate the original location of this corner. Corner in good condition. Blazed and scribed the following new bearing trees: Set nails in:

Tamarack	9"	N34°W	17.1 feet
Spruce	6"	N54°E	15.0 feet
Tamarack	7"	N72°E	11.3 feet
Tamarack	9"	S20°E	32.9 feet
Set steel sign post		West	1.0 feet

Dated at Minocqua, Wis., this 21st day of March, 1985

Signature: John H. Fisher, Title: Registered Land Surveyor, Registration No. S-8336 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, at 3300 clock, I hereby certify that the within instrument was filed in this office for record on the 23 day of April, 1985

Signature: Doris Verage Kuehn (Register of Deeds)

By: Deputy

3811012000

