

CERTIFIED LAND CORNER RESTORATION

Index No. K-21

State of Wisconsin

County of Oneida } ss.


I Daniel K. Pleoeger, do hereby certify that on the 17th day of July, 1980, I ~~restored~~ established the N 1/16 corner of section 13 and 14 Township 39, North, Range 8 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafflin

Herb Wagoner

Dan Pleoeger



History of original corner establishment:  
No record of any previous surveys.  
Established corner by traverse and computation. Ran traverse from previously established section corner 11, 12, 13 and 14 to section corner 13, 14, 23, and 24.  
Computed distance found to be 5260.658 feet at bearing N 2° 33' 33" E. Set 1/4 corner at 2630.329. Set the N 1/16 at 1315.165 feet intermediate between the W 1/4 corner and section corner 11, 12, 13 and 14.

Description of corner evidence found:  
**Recovered an old 2" iron pipe which bears west 0.95 feet when we set the new monument.**

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1-1/2" iron pipe with 2" brass cap for corner, projecting 18" above ground.

Cap stamped:


Marked NBT's -

J.Pine 5" N22°W 21.74'

R.Pine 6" S28°W 20.42'

scribed 1/16 BT.

T39N R8E  
N 1/16 14 + 13  
S1537  
CPI-1980

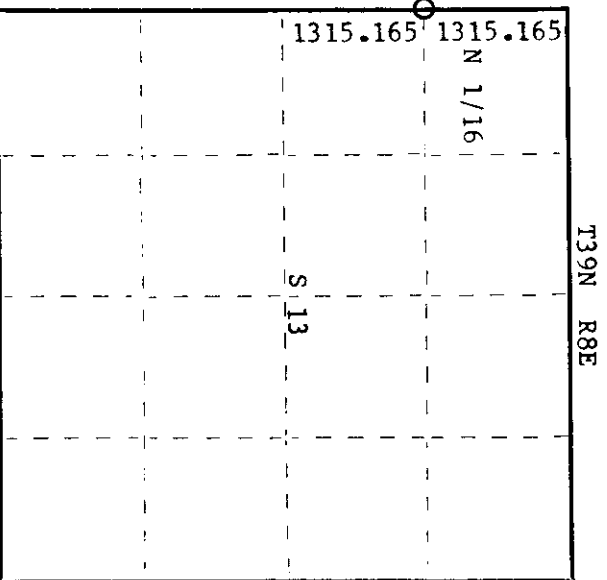

○ = Corner monument restored.

Dated at Rhineland, Wis., this 21st day of July, 1980.

Signature Daniel K. Pleoeger Title Registered Land Surveyor Registration No. S1537  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida 5074 day of July, 1980  
at 10:15 o'clock A. M. I hereby certify that the within instrument was filed in this office for record on the 5074 day of July, 1980.

Terri Berge Fuchs  
(Register Deeds)

By: \_\_\_\_\_ Deputy

3908143000