

CERTIFIED LAND CORNER RESTORATION

Index No. R-1

State of Wisconsin

County of Oneida } ss.



I Phillip T. Hansen, do hereby certify that on the 1st day of February, 1978, I found evidence of the Section corner of 24, 19, 25, 30 Township 39, North, Range 9 & 10 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafflin

Herb Wagoner

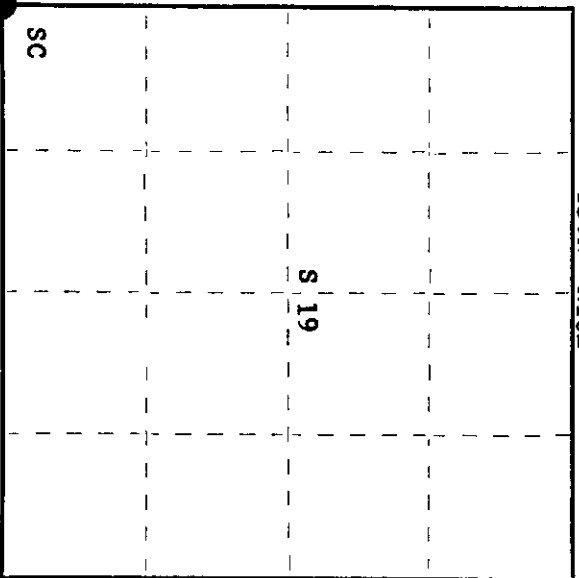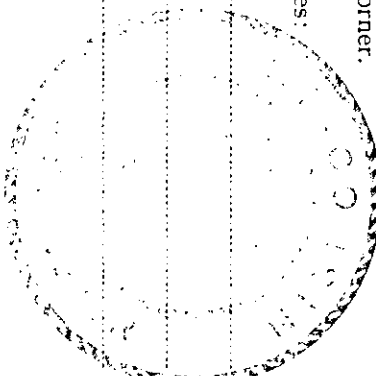

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Hiram C. Fellows, Deputy Surveyor.

F.R. Wincentsen notes of 1952 claims to have recovered a corner set by O. Odman in 1927.

Corner recovered by N. Loftus, Ripco Surveyor, in 1955. Recovered F.R. Wincentsen's post. Marked NBT's - Red Pine 6" N7°E, 18 links. White Pine 6" S32°E, 49 links.

Description of corner evidence found:

Recovered 2" iron pipe with 4" square brass cap. Also a 5" square cedar post. Claimed to have been set by Odman in 1927.

Recovered OBT's - Red Pine 6" (7") N7°E (N12°E), 18.0 links (19.5 lks.), scribed S19 BT.

White Pine 6" (8") S32°E, 49.0 links (50.5 links).

Our distance to iron pipe.

Red Pine 20" N38°E, 11.5 links, scribbling grown over.

Monument projects 20" above ground. Cap stamped:

T39N R10E  
24 19  
25 T 30  
R9E R10E  
25 T 30

Description of monument and accessories I established to perpetuate the original location of this corner. R1PCCO

Left monument in place as recovered.

Marked NBT's - Red Pine 16" N82°E, 57.2 links.

White Pine 8" N14°W, 17.0 links., both scribed SC-BT.

Dated at Rhineland, Wis., this 3rd day of February, 1978

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 7th day of February, 1978 at 2:00 o'clock P. M.

Dorrie Verage Kuehn  
(Register of Deeds)

By: \_\_\_\_\_ Deputy

3909240000