

0002210139

State of Wisconsin

County of Vilas } ss.

I, James L. Will, do hereby certify that on the 29th day of October, 1981, I found evidence of the East 1 corner of Section 12 Township 39, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Eric Zyhowski

History of original corner establishment:

Original corner was established in the course of the subdivision of T 39 N, R 10 E which was started on September 30, 1863 and completed on October 7, 1863 by William E. Daugherty, Deputy Surveyor.


Original B.T.'s  
12" Maple S 78° W 21 lks.  
36" W. Pine N 37° E 32 lks.

Description of corner evidence found:

Found iron pipe in place commonly used and accepted as the 1/4 corner in previous surveys by other surveyors.  
Found the following Bearing Trees:  
12" Oak S 90° E 56.56 feet.  
22" N. Pine S 50° W 55.40 feet.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set 2" x 5' long iron pipe with brass cap in place of the iron pipe.  
Set 4" x 4" Cedar post West 7.43 feet from the corner.




Dated at Eagle River, Wis., this 2nd day of November, 1981.

Signature James L. Will Title Deputy County Surveyor Registration No. S-1410  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of \_\_\_\_\_, I hereby certify that the within instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_ at \_\_\_\_\_ o'clock \_\_\_\_\_ M.

(Register of Deeds)

By \_\_\_\_\_ Deputy

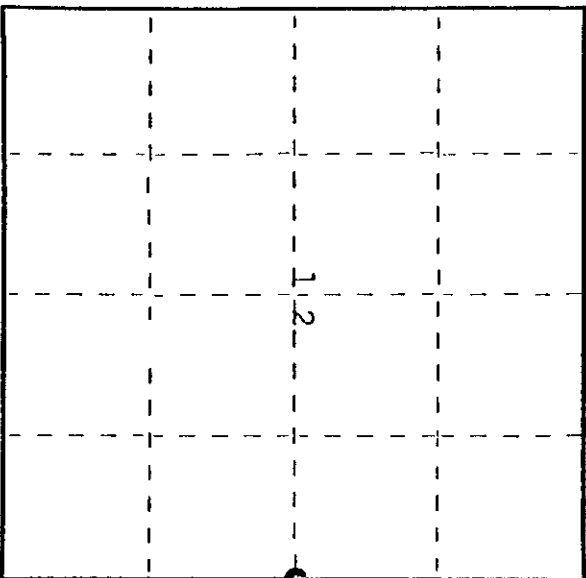

● = Corner monument restored.