

CERTIFIED LAND CORNER RESTORATION



Index No. L-1

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 29th day of May, 1979, I found evidence of the Quarter corner of Sections 13 and 18 Township 37, North, Range 9 & 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Jim Clafflin
Herb Wagoner

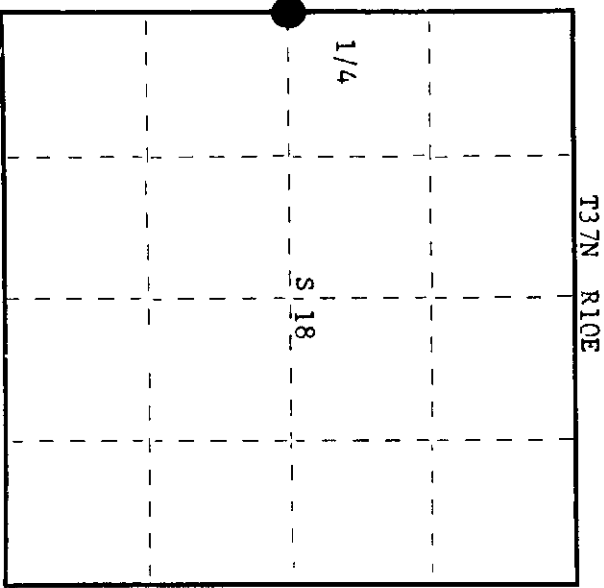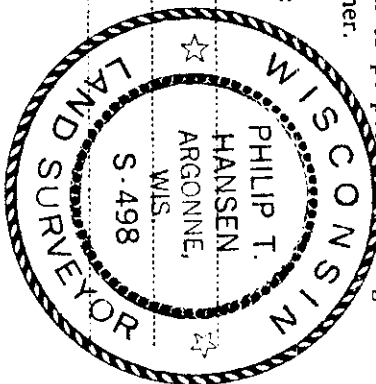

○ = Corner monument restored.

History of original corner establishment:

Original corner established by A. Millard in 1860 from which W.Pine 14" bears S80°W 15 links and W.Pine 12" bears N53°E 12 links. Corner established by N. Loftus, Ripco surveyor. Have no records of his survey.

Description of corner evidence found:

Recovered Ripco's monument, 2" iron pipe with 4" brass cap, in good condition and securely set. Monument projects 8" above ground. Cap stamped:

Recovered OBT -
Jack Pine 8" N78°W 10.5 links, scribed 1/4S 13 FT.
(now a cut off stump)
Jack Pine 12" N8°W 22.5 links, scribed 1/4S 13 T37N R9E BT.
T37N R9E T37N R10E
1/4S 13+18
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.

Monument left in place as recovered.
Monument sets on the west side of Roosevelt fire lane.

Marked NBT's -
R.Pine 5" N61°W 38.4 links.
R.Pine 5" S84°W 35.1 links, scribed 1/4 BT.

Dated at Rhinelander, Wis., this 18th day of June, 1979

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 7th day of July, 1979 at 102 o'clock P.M.

Dorci George Fisher
(Register of Deeds)

By Dorci George Fisher Deputy

3709132000